
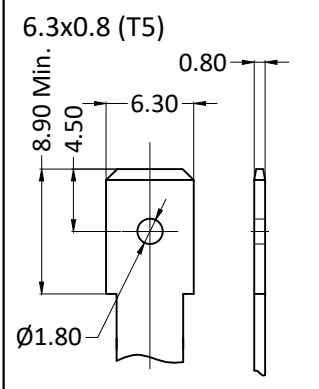
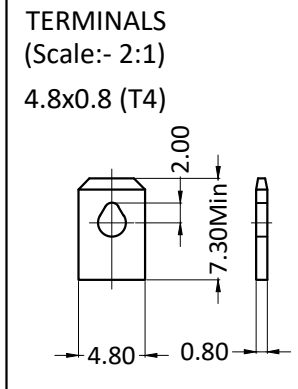
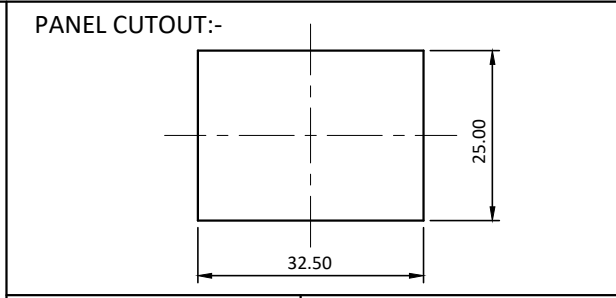


PRODUCT CODE:- EMI-18-X (Series)	CATEGORY:- IEC INLET
--	--------------------------------

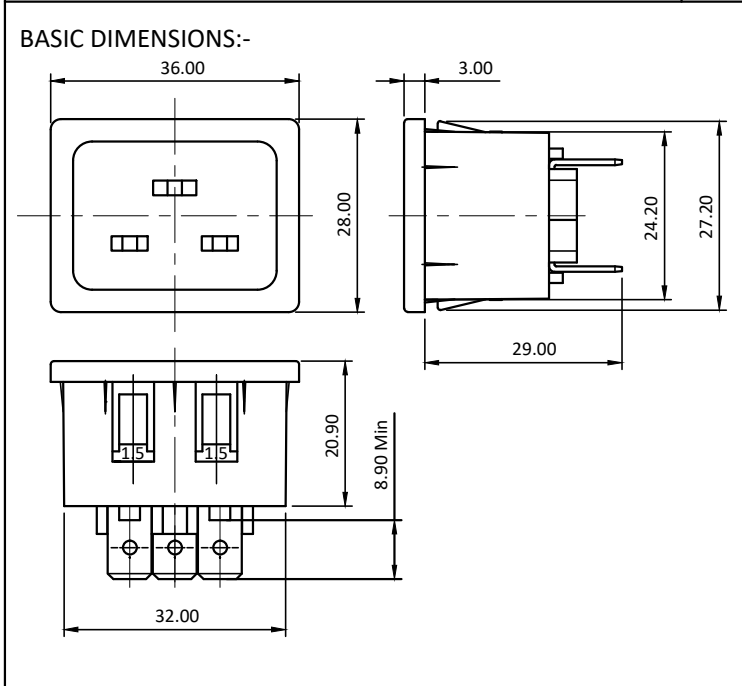

SPECIFICATION TABLE:-

SR.NO.	PARAMETER	SPECIFICATION
1	V/A Rating	16A 250V AC 20A 250V AC
2	Contact Resistance (Initial)	10 m ohms max.
3	Insulation Resistance At 500 V DC	1000 M ohms min.
4	H.V.Break Down Test (For 1-Minute)	2 KV AC
5	Panel Thickness Other : Available on request	Standard : 1.5 Refer Ordering Table
6	Mounting	Panel, Snap-in type
7	Terminals	Solder-type / Fast-On
8	Permissible Temp.	(a) With/Without Load 0°C To 70°C 0°C To 65°C *
		(b) For Soldering 270°C for 5 Sec. max.
9	(a) Body	Nylon-6, GF20%, V-2
	(b) Terminals	Brass, Tin plating
	(c) Contacts	Brass, Nickel plating
10	Reference Standard	IEC 60320-1, IEC 60320-3, UL-498, CSA : C22.2 No.182.3
11	Compliance Marking	
12	Approvals	

* : Also available for temp. rating up to 125°C on request (For UL only)

ORDERING CODE:-

SERIES	PANEL THICKNESS	TERMINAL DETAILS												
EMI-18	No Suffix 1.5 K 0.9 A 1.0 B 1.2 D 1.8 E 2.0 G 2.5 J 3.0	<table border="1"> <thead> <tr> <th></th> <th>A (Capsule Hole)</th> <th>B (Drop Hole)</th> <th>C (Fast-on)</th> </tr> </thead> <tbody> <tr> <td>T4 4.8x0.80</td> <td></td> <td></td> <td></td> </tr> <tr> <td>T5 6.3x0.80</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		A (Capsule Hole)	B (Drop Hole)	C (Fast-on)	T4 4.8x0.80				T5 6.3x0.80			
	A (Capsule Hole)	B (Drop Hole)	C (Fast-on)											
T4 4.8x0.80														
T5 6.3x0.80														

EXAMPLE :-
 1)EMI-18-T5B
 2)EMI-18-BT5B

APP	18.05.06	SBP	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com						
CHK	18.05.06	SNV							
DRN	18.05.06	SNV							
REV	IS	WAS	DATE	SIGN	APP.	BY	DATE	SIGN	
UNSP.TOLERANCE		DIMNS. IN	WT(Gm)	SCALE:-	PROJECTION	SHEET	DRAWING NUMBER		
OVER	- 1 10	mm	Max.	NTS.		1 OF 1	P E M I 2 0 1 8		
UP TO	1 10 -	Moulding, plating details as per Bill of Material			REVISION			0	
±	0.2 0.3 0.5	Unspecified colour is Black, GF:Glass filled.							