
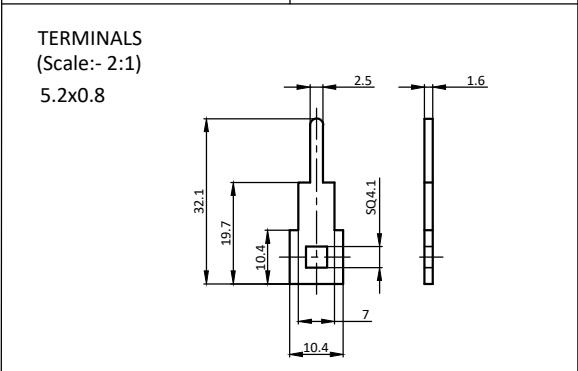




PRODUCT CODE:- **EMI-30-X (Series)**

CATEGORY:- **IEC INLET**

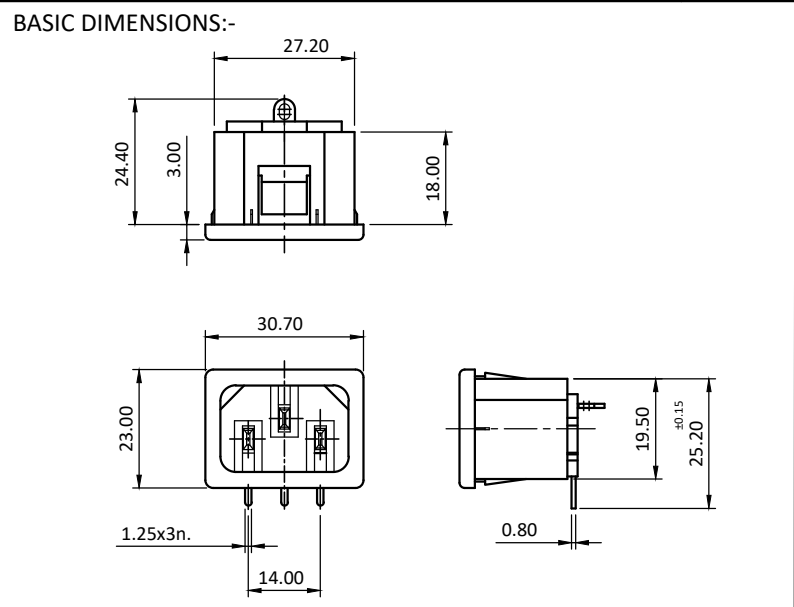

SPECIFICATION TABLE:-

SR.NO.	PARAMETER		SPECIFICATIONS
1	V/A Rating		10A 250V AC 15A 250V AC
2	Contact resistance (Initial)		10 mohms max.
3	Insulation resistance at 500 V DC		1000 Mohms min.
4	H.V.Break down test (For 1minute)		2 KV AC
5	Panel thickness (Max.) Other : Available on request		Standard : 1.5 Refer Ordering Table
6	Mounting		PCB OR Panel, Snap-in type
7	Terminals		Solder-type
8	Permissible temp.	(a)With/Without load	0°C To 70°C 0°C To 65°C
		(b)For Soldering	270°C for 5 Sec. max.
9	Material	(a) Body	Nylon-6, GF20%, V-2
		(b) Terminals	Brass, Tin plating
		(C) Contacts	Brass, Nickel plating
10	Reference standards		IEC 60320-1, IEC 60320-3, UL-498, CSA : C22.2 No.182.3
11	Compliance Marking		
12	Approvals		

: Also available for temp. rating up to 125°C on request (For UL only)

ORDERING CODE:-

SERIES	PANEL THICKNESS
EMI-30	No Suffix 1.5
	K 0.9
	A 1.0
	B 1.2
	D 1.8
	E 2.0
	G 2.5
	J 3.0

EXAMPLE :-
1)EMI-30-B

APP	31.05.08	PBM	Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com												
CHK															
DRN	31.05.08	UAJ													
REV	IS	WAS	DATE	SIGN	APP.	BY	DATE	SIGN							
UNSP.TOLERANCE		DIMNS. IN	WT(Gm)	SCALE:-	PROJECTION	SHEET	DRAWING NUMBER								
OVER	- 1 10	mm	Max.	NTS.		1 OF 1	P	E	M	I	2	0	3	0	REVISION
UP TO	1 10 -	Moulding, plating details as per Bill of Material													0
±	0.2 0.3 0.5	Unspecified colour is Black, GF:Glass filled.													