
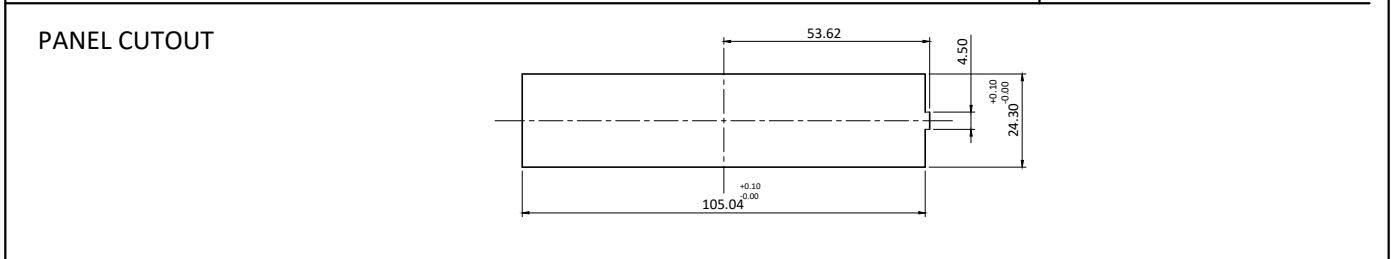


PRODUCT CODE:-	<b>ENO-0520-43-X</b>	CATEGORY:-	<b>NEMA SOCKET</b>
----------------	----------------------	------------	--------------------

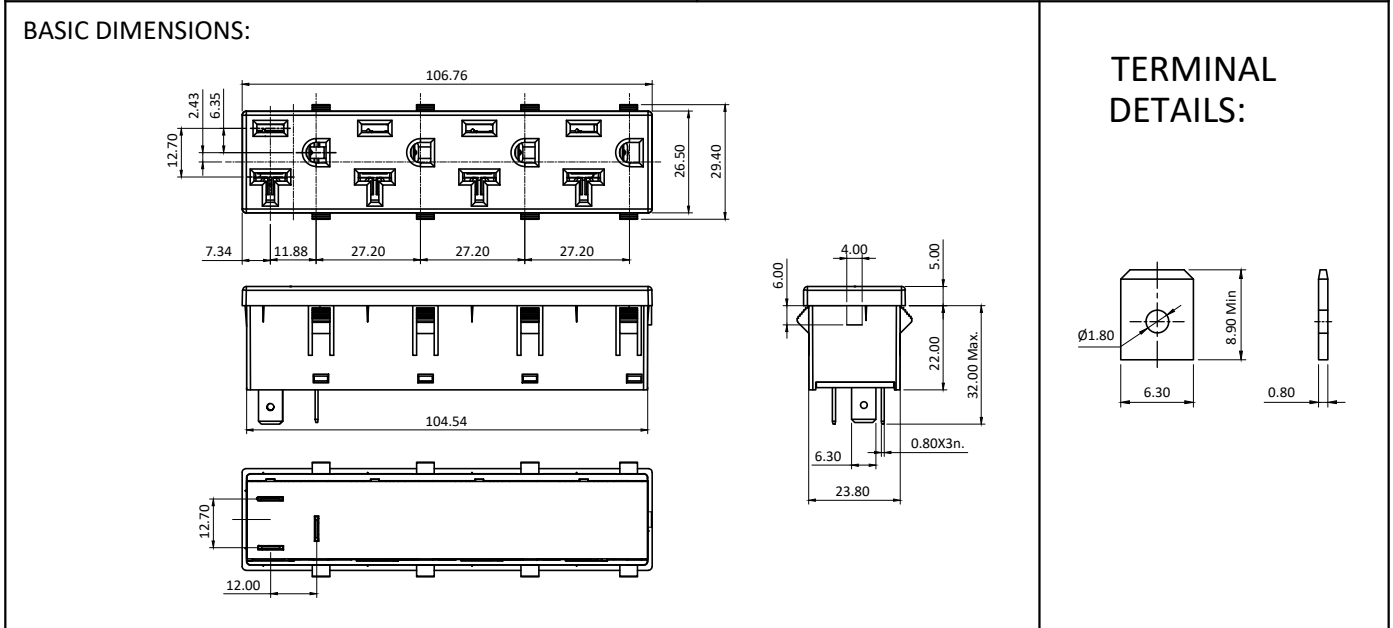

**SPECIFICATION TABLE:**

SR.NO.	PARAMETER		SPECIFICATION
1	Connector Type		5-20R Type
2	V/A Rating		125 VAC, 20 A
3	Contact Resistance (Initial)		10 mohms max.
4	Insulation Resistance At 500 V DC		100 Mohms min.
5	H.V.Break Down Test (For 1-Minute)		2 KVAC
6	Mounting		Panel, Snap mounting
7	Panel Thickness		1.00-2.00mm
8	Terminals		6.30 x 0.80
9	Withdrawal force in kg		1.3 to 6.7 kg.
10	Permissible Temp.	(a) With/Without Load	0°C TO 65°C
		(b) For Soldering	270°C for 5sec. max.
11	Material	(a) Body, Cover	Nylon-6, UL-94 V-0
		(b) Contacts, Terminals	Brass ,Tin Plating
12	Reference Standard		UL-498, UL-486E, NEMA WD 6:2002, CSA C22.2 NO. 42-99.
13	Approvals		

⊛ : Also available for temp. rating up to 125°C on request (For UL only)

						APP	30.04.15	GJG	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India <b>Elcom International Pvt. Ltd.</b> www.elcom-in.com	
						CHK	30.04.15	PGP		
						DRN	30.04.15	PPD		
REV	IS	WAS	DATE	SIGN	APP.	BY	DATE	SIGN		
UNSP.TOLERANCE			DIMNS. IN	WT(Gm)	SCALE:-	PROJECTION	SHEET	DRAWING NUMBER		
OVER	-	1	10	mm	Max.	NTS.	1 OF 1	P E N O 2 1 1 1 2		
UP TO	1	10	-	Moulding, plating details as per Bill of Material				REVISION		
±	0.2	0.3	0.5	Unspecified colour is Black, GF:Glass filled.				0		

F:ENG-08.00

Note: Technical specifications are subject to change without prior notice

Copyright © 2019 by Elcom International Pvt.Ltd, India. All rights reserved