



## Power Distribution Unit

Product Code/Part Code: EIS-S624D-DE303VX

### Specification Sheet:

---

#### Input

• Voltage:	1 $\Phi$ , 230VAC
• Frequency:	50 Hz / 60Hz (As per supply input)
• Power In Socket Type:	1 $\Phi$ , 32 Amps, IEC 60309(P+N+E), 230VAC
• Cord Length:	3 meters
• Input Current:	32 Amps

#### Output

• Voltage:	230VAC
• Frequency:	50Hz / 60Hz (As per supply input)
• Power out Socket Type:	IEC-60320 C13 (21 Nos.), IEC-60320 C19 (03 Nos.)
• Current Operating range:	32 Amps

#### Features

- Individual Current Monitoring: Monitors the Individual / Total current flowing through the device.
- Individual Switching: User can control outlet level current, receptacle level control.
- Monitors and Tracks Individual power consumption.
- Conforms to CLASS I measurement accuracy.
- Socket level Monitoring and Metering of electric parameters: Voltage (V), Current (I), Energy (kWH) Power (kVA, kVAR), Power factor (cos  $\Phi$ )
- Current Threshold settings with warning LED on front panel and Buzzer alarm.
- LED Display of Aggregate current on front panel.
- Networking: 10/100 Base Ethernet Port.
- Provision to connect Temperature - Humidity Sensor.
- Hot Swappable Controller.
- Total No. of outlets: 24 - IEC-60320 C13 (21 Nos.), IEC-60320 C19 (03 Nos.)
- Branch Circuit Protection: Two (2) x 16A Hydraulic Magnetic Circuit Breaker



### **User Interface:**

- Integrates with any DCIM System through SNMP.

### **Interface and Protocol Support**

- HTTP
- SNMP V1
- MODBUS TCP/IP
- MODBUS RTU(RS-485)
- FTP
- DHCP
- IPV4 Support
- Telnet

### **Mechanical**

- Dimensions (L x W x H): 1600mm x 60mm x 85mm
- Weight: Approx.6.0 Kg
- Mounting: 1244.50mm
- Display / control panel: Three-digit 7 segment Display
- Color: RAL 9005
- Finish: Fine texture


### **Environmental Requirements**



- Operating temperature: 0 – 45°C (Extended up to 65°C)
- Humidity: 0 – 95 % RH non-condensing

Product Drawing

PRODUCT CODE:- <b>EIS-S624D-DE303VX</b>	CATEGORY:- <b>SMART RACK-PDU</b>
---	----------------------------------

**BASIC DIMENSIONS**

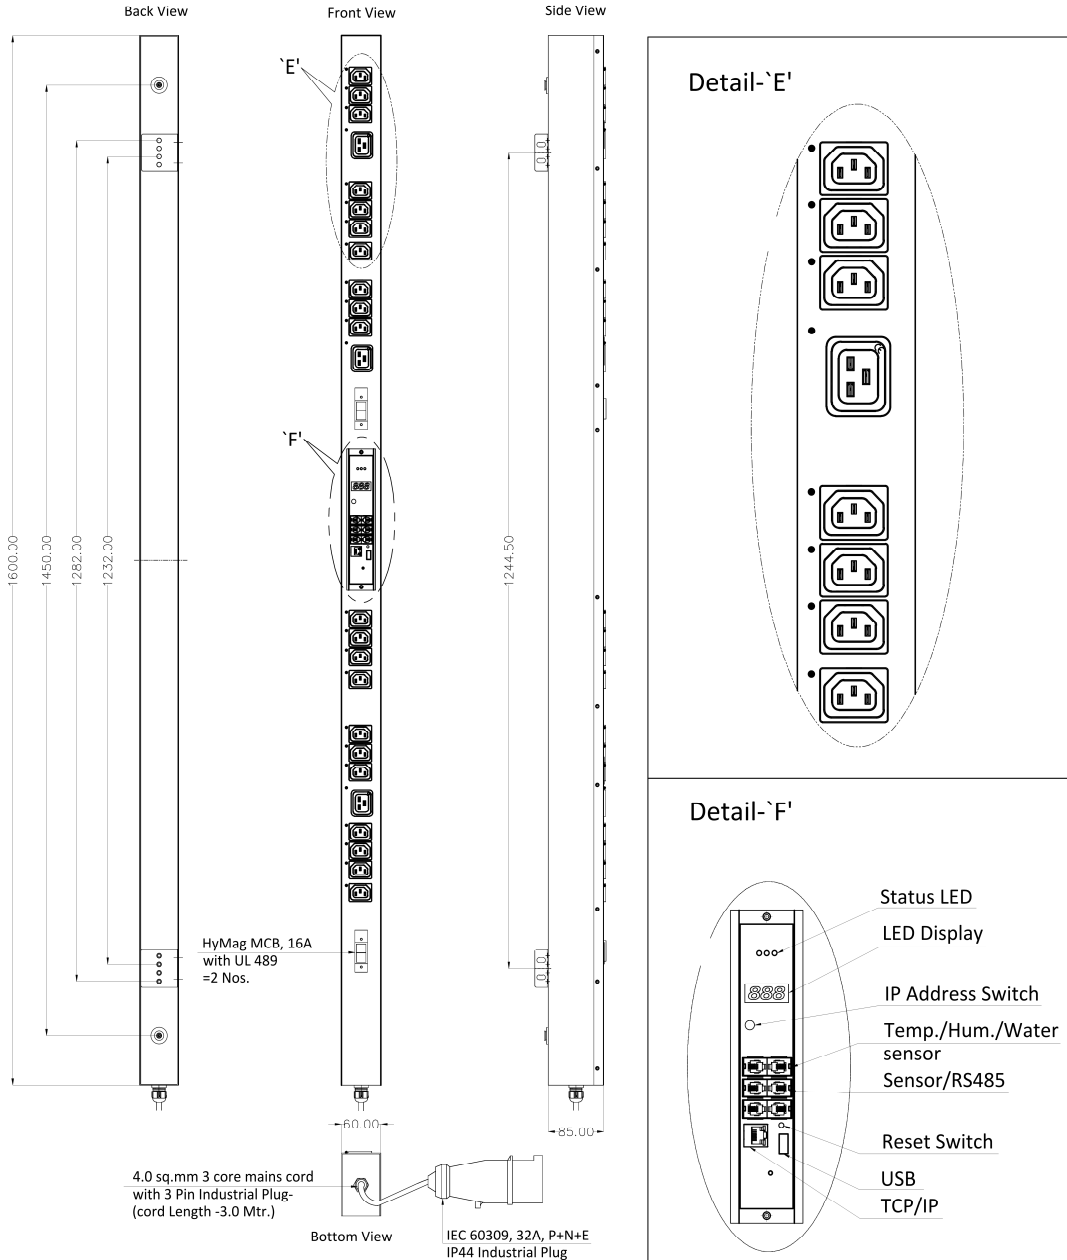

												 <p>Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India <b>Elcom International Pvt. Ltd.</b> www.elcom-in.com</p>																																						
					APP	01.08.19	MRM																																											
					CHK	01.08.19	RNV																																											
					DRN	01.08.19	VAIBHAV																																											
REV	IS	WAS	DATE	SIGN	APP.	BY	DATE	SIGN																																										
UNSP.TOLERANCE			DIMNS. IN	WT(Gm)	SCALE:-		PROJECTION	SHEET	DRAWING NUMBER																																									
OVER	-	1	10	mm	Max. NTS.			1 OF 1	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:10%;"></td> <td style="width:10%;"></td> <td style="width:10%;"></td> <td style="width:10%;"></td> <td style="width:10%;"></td> <td style="width:10%;"></td> <td style="width:10%;"></td> <td style="width:10%;"></td> <td style="width:10%;"></td> <td style="width:10%;"></td> <td style="width:10%;"></td> <td style="width:10%;"></td> <td style="width:10%;"></td> </tr> <tr> <td colspan="11"></td> <td style="text-align: center;">REVISION</td> </tr> <tr> <td>±</td> <td>0.2</td> <td>0.3</td> <td>0.5</td> <td colspan="8" style="text-align: center;">Moulding, plating details as per Bill of Material Unspecified colour is Black, GF-Glass filled.</td> <td style="text-align: center;">0</td> </tr> </table>																												REVISION	±	0.2	0.3	0.5	Moulding, plating details as per Bill of Material Unspecified colour is Black, GF-Glass filled.								0
											REVISION																																							
±	0.2	0.3	0.5	Moulding, plating details as per Bill of Material Unspecified colour is Black, GF-Glass filled.								0																																						

F:ENG-08.00

Note: Technical specifications are subject to change without prior notice

Copyright © 2019 by Elcom International Pvt.Ltd, India. All rights reserved