



## Power Distribution Unit

Product Code/Part Code: EIS-S627A-DE336VX

### Specification Sheet:

---

#### Input

• Voltage:	1 $\Phi$ , 230VAC
• Frequency:	50 Hz / 60Hz (As per supply input)
• Power In Socket Type:	1 $\Phi$ , 32 Amps, IEC 60309(P+N+E), 230VAC
• Cord Length:	3 meters
• Input Current:	32 Amps

#### Output

• Voltage:	230VAC
• Frequency:	50Hz / 60Hz (As per supply input)
• Power out Socket Type:	IEC-60320 C13 (21 Nos.), IEC-60320 C19 (06 Nos.)
• Current Operating range:	32 Amps

#### Features

- Individual Current Monitoring: Monitors the Individual / Total current flowing through the device.
- Individual Switching: User can control outlet level current, receptacle level control.
- Monitors and Tracks Individual power consumption.
- Conforms to CLASS I measurement accuracy.
- Socket level Monitoring and Metering of electric parameters: Voltage (V), Current (I), Energy (kWH) Power (kVA, kVAR), Power factor (cos  $\Phi$ )
- Current Threshold settings with warning LED on front panel and Buzzer alarm.
- TFT Color Display.
- Networking: 10/100 Base Ethernet Port.
- Provision to connect Temperature - Humidity Sensor.
- Hot Swappable Controller.
- Total No. of outlets: 27 - IEC-60320 C13 (21 Nos.), IEC-60320 C19 (06 Nos.)
- Branch Circuit Protection: Two (2) x 16A Hydraulic Magnetic Circuit Breaker



## User Interface:

- Integrates with any DCIM System through SNMP.

## Interface and Protocol Support

- HTTP
- SNMP V1
- MODBUS TCP/IP
- MODBUS RTU(RS-485)
- FTP
- DHCP
- IPV4 Support
- Telnet

## Mechanical

- Dimensions (L x W x H): 1700mm x 60mm x 85mm
- Weight: Approx.6.00 Kg
- Mounting: 1393.50mm
- Display / control panel: TFT Color Display
- Color: RAL 9005
- Finish: Fine texture

## Environmental Requirements

- Operating temperature: 0 – 45°C (Extended up to 65°C)
- Humidity: 0 – 95 % RH non-condensing

## Conformance

### Approvals

- cULus

### Marking

- CE
- cULus




### Environmental Compliance


- RoHS

Product Drawing

PRODUCT CODE:- <b>EIS-S627A-DE336VX</b>	CATEGORY:- <b>SMART RACK-PDU</b>
--	-------------------------------------

BASIC DIMENSIONS

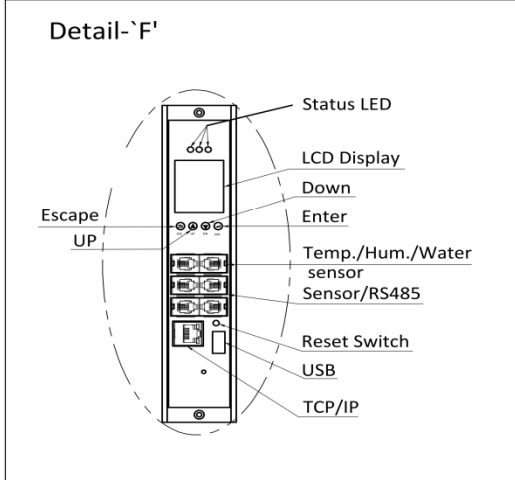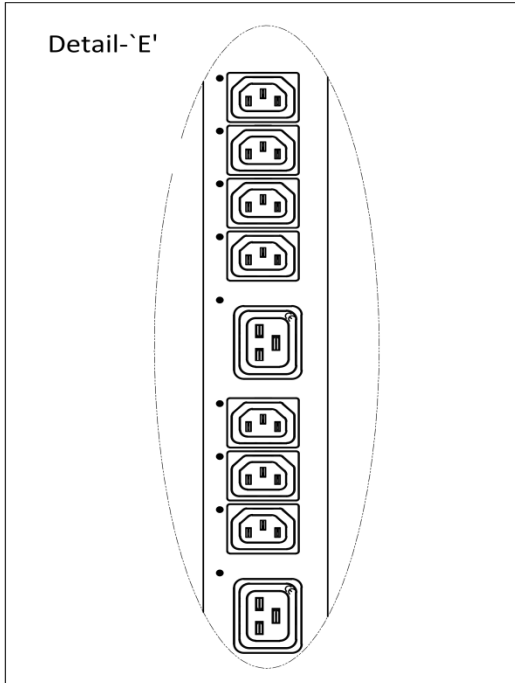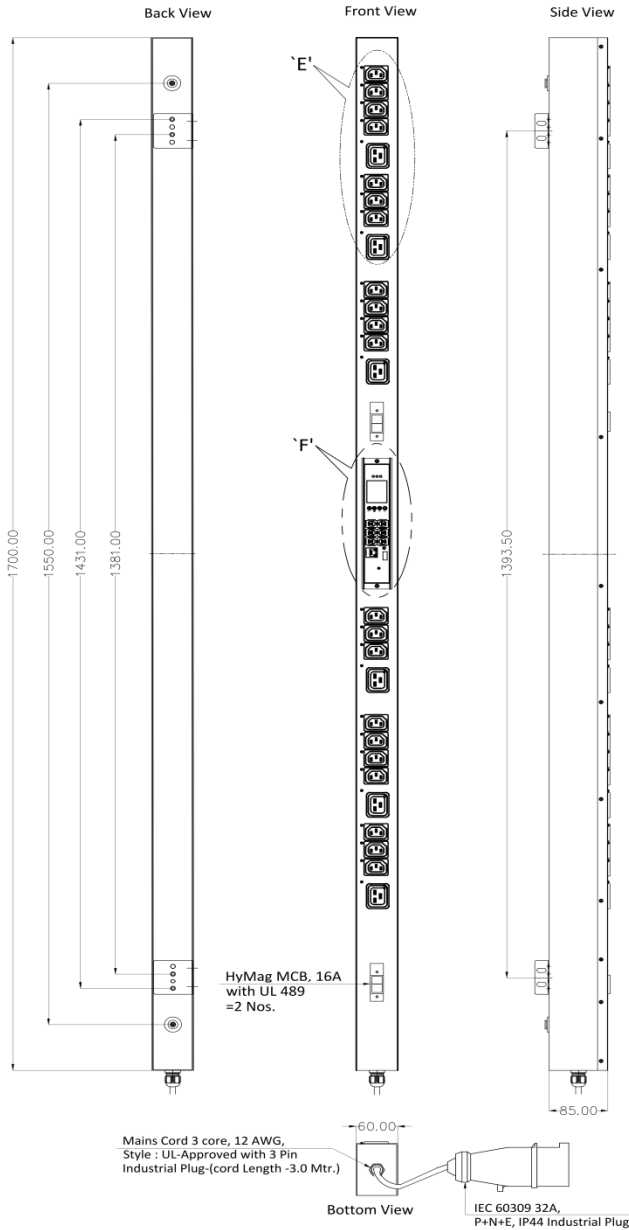

						APP	01.08.19	MRM	 <p>Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com</p>
						CHK	01.08.19	SBP	
						DRN	01.08.19	RNV	
REV	IS	WAS	DATE	SIGN	APP.	BY	DATE	SIGN	
UNSP.TOLERANCE		DIMNS. IN	WT(Gm)	SCALE:-	PROJECTION	SHEET	DRAWING NUMBER		
OVER	-	1	10	mm	Max.	NTS.	1	OF 1	- - - - -
UP TO	±	0.2	0.3	0.5	Moulding, plating details as per Bill of Material Unspecified colour is Black, GF:Glass filled.				REVISION
									0

F:ENG-08.00

Note: Technical specifications are subject to change without prior notice

Copyright © 2019 by Elcom International Pvt.Ltd, India. All rights reserved